

An Improved Definition of Blossoms and a Simpler Proof of the MV Matching Algorithm

*Vijay V. Vazirani**

December 16, 2012

Abstract

Central to a proof of the Micali-Vazirani general graph maximum matching algorithm [MV80] is a definition of blossoms from the perspective of minimum length alternating paths [Vaz94]. In this paper we give a new, recursive, definition of blossoms which, although equivalent to the old one, is more elementary and hence yields new structural facts. These facts, and other insights, have yielded a simpler proof of the algorithm. With the benefit of hindsight, we also give a simpler exposition of the algorithm. For all practical purposes, this is still the most efficient known maximum matching algorithm.

1 Introduction

A proof of the Micali-Vazirani general graph maximum matching algorithm [MV80] was given in [Vaz94]; central to this proof was a definition of blossoms from the perspective of minimum length alternating paths. In this paper we give a new, recursive, definition of blossoms which, although equivalent to the old one, is more elementary and hence yields new structural facts. These facts, and other (more modest) insights, have yielded a simpler proof of the algorithm. Additionally, with the benefit of hindsight, we also give a simpler exposition of the algorithm.

The main new message of [Vaz94] and the current paper is that a substantial graph-theoretic development is required not only for proving correctness of the algorithm but also for expounding it in a precise manner. As described below, there are some fundamental hurdles to finding minimum length augmenting paths efficiently in non-bipartite graphs, a basic step of the algorithm, and the algorithm exists precisely because of the structural properties found in this graph-theoretic expose. Our contention is that the best way to understand the algorithm is to comprehend how it uses this structure as “footholds” to home in on a solution¹.

Matching has had a long and distinguished history spanning more than a century. The following quote from Lovasz and Plummer’s classic book [LP86] is most revealing:

Matching theory serves as an archetypal example of how a “well-solvable” problem can be studied. ... [It] is a central part of graph theory, not only because of its

*Supported by NSF Grants CCF-0914732 and CCF-1216019. College of Computing, Georgia Institute of Technology, Atlanta, GA 30332-0280, E-mail: vazirani@cc.gatech.edu.

¹Indeed, once the reader is sufficiently comfortable with the structure and the algorithm, they will be able to appreciate how the latter blends harmoniously into the former.

applications, but also because it is the source of important ideas developed during the rapid growth of combinatorics during the last several decades.

Interestingly enough, matching has played an equally central role in the development of the theory of algorithms – time and again, its study has not only yielded powerful tools that have benefited other problems but also quintessential paradigms for the entire field. Examples of the latter include the primal-dual paradigm [Kuh55], the definitions of the classes $\mathbf{P}$ [Edm65b] and $\# \mathbf{P}$ [Val79], and the equivalence of random generation and approximate counting for self-reducible problems [JVV86]. Examples of the former include the notion of an augmenting path [Kon31, Ege31], a method for determining the defining inequalities of the convex hull of solutions to a combinatorial problem [Edm65a], the canonical paths argument for showing expansion of the underlying graph of a Markov chain [JS89], and the Isolating Lemma [MVV87]. And at the interface of algorithms and game theory lies another highly influential matching algorithm: the Nobel Prize winning stable matching algorithm of Gale and Shapley [GS62].

The running time of the MV algorithm is $O(m\sqrt{n} \cdot \alpha(m, n))$ on the pointer model (using Tarjan’s set union algorithm [Tar75]), where α is the inverse Ackerman function, and $O(m\sqrt{n})$ on the RAM model (using Gabow and Tarjan’s linear time algorithm for a special case of set union [GT85]). Small theoretical improvements to the running time, for the case of very dense graphs, have been given in recent years: $O(m\sqrt{n}\log(n^2/m)\frac{\log}{n})$ [GK04] and $O(n^w)$ [MS04], where w is the best exponent of n for multiplication of two $n \times n$ matrices. The former improves on MV for $m = n^{2-o(1)}$ and the latter for $m = \omega(n^{1.85})$; additionally, the latter algorithm involves a large multiplicative constant in its running time due to the use of fast matrix multiplication. Over the years, other algorithms having the same running time as MV have also been obtained [Blu90, GT91]; however, the MV algorithm appears to be the simplest among these. The rest of the history of matching algorithms is very well documented and will not be repeated here, e.g., see [LP86, Vaz94].

The MV algorithm finds augmenting paths in phases; in each *phase*, it finds a maximal set of disjoint minimum length augmenting paths w.r.t. the current matching and it augments along all paths. It is easy to show that only $O(\sqrt{n})$ such phases suffice for finding a maximum matching [HK73, Kar73]. The remaining task is designing an efficient algorithm for a phase. However, unlike the bipartite case, in non-bipartite graphs minimum length alternating paths do not possess an elementary property, called breadth first search honesty² in Section 2. Indeed, in the face of this debilitating shortcoming, the problem of finding minimum length alternating paths appears to be intractable. It is a testament to the remarkable structural properties of matching that despite this, such an efficient algorithm is possible.

1.1 Overview and contributions of this paper

This paper is fully self-contained. Sections 2 and 3 give some basic structural properties of minimum length alternating paths which are needed for defining blossoms. Especially worth mentioning is Theorem 6, which leads to the central notion of base of a vertex. This notion captures, in a simple manner, the essential aspect of what would have otherwise been an enormously complicated picture; see the diverse-looking examples given in Theorem 6 to illustrate the various cases that can arise.

²Intuitively, it states that one needs to find only shortest paths to nearby vertices in order to find shortest paths to far away ones – longer paths are never needed.

The new definition of blossoms is presented in Section 4. In turn, blossoms, and their nesting structure, impose a strict regimen on how minimum length alternating paths traverse through them. These facts, an outcome of the new definition of blossoms, are established in Section 4. These facts go to proving Theorem 25 in Section 5 which contains a crucial structural fact that makes the algorithm possible for the non-bipartite case.

The MV algorithm involves two main ideas: the new search procedure called double depth first search (DDFS) and the precise synchronization of events. The former is described in the simplified setting of a layered, directed graph in Section 6 and the latter is described in Section 7. Both have been presented at a much higher level than in [MV80] and [Vaz94] – without resorting to Pidgin Algol code and low level notions, e.g., anomaly edges – and intuitive proofs have been given for their correctness. Sections 2, 3, 4 and 5 state key definitions which are essential for understanding the algorithm. Knowing the statements of theorems will also help; however, their proofs are not essential for this purpose. To the readers who are interested in quickly understanding the algorithm, we recommend that they dovetail appropriately between Sections 6 and 7, and the rest of the paper.

Section 8 ties up all the facts and completes the proof. Finally, equivalence of the two definitions of blossoms is established in Section 9. It is difficult to overemphasize the importance of well-chosen examples for understanding this result; indeed, most of the intuition lies in them and we have included several³.

While writing this paper, we have also thoroughly checked [Vaz94]. Although all the important claims made in that paper are correct, not all proofs are complete and “bug-free”. This is especially true of Theorems 5 and 6 in [Vaz94], which were proven using complicated case analyses. These facts are proven in Theorem 22 in a more principled way using the new definition of blossoms. Additionally, we hope that the simplification achieved in this paper will make the result more accessible to the research community. For these reasons, the current paper is more suitable for pedagogical and archival purposes.

2 The tenacity of vertices and edges

All definitions are with respect to a matching M in graph $G = (V, E)$. We will assume that G has at least one unmatched vertex. Throughout, l_m will denote the length of a minimum length augmenting path in G ; if G has no augmenting paths, we will assume that $l_m = \infty$.

Definition 1 (Evenlevel and oddlevel of vertices) The evenlevel (oddlevel) of a vertex v , denoted $\text{evenlevel}(v)$ ($\text{oddlevel}(v)$), is defined to be the length of a minimum even (odd) length alternating path from an unmatched vertex to v ; moreover, each such path will be called an $\text{evenlevel}(v)$ ($\text{oddlevel}(v)$) path. If there is no such path, $\text{evenlevel}(v)$ ($\text{oddlevel}(v)$) is defined to be ∞ .

In all the figures, matched edges are drawn dotted, unmatched edges solid, and unmatched vertices are drawn with a small circle. In Figure 1, evenlevels and oddlevels of vertices are indicated; missing levels are ∞ .

In bipartite graphs, a vertex v can have either an even or an odd length alternating path from an

³Furthermore, they have been drawn in such a way that they easily reveal their structural properties – this involves drawing vertices in layers, according to their minlevel.

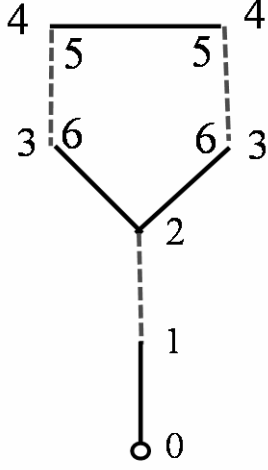


Figure 1: Evenlevels and oddlevels of vertices are indicated; missing levels are ∞ .

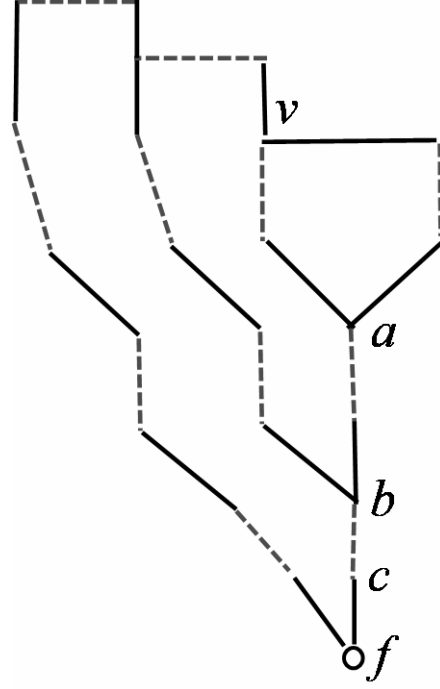


Figure 2: Vertex v is not BFS-honest on $\text{oddlevel}(a)$ and $\text{evenlevel}(c)$ paths.

unmatched vertex f , not both. Furthermore, minimum length alternating paths are *breadth first search honest* in the sense that if p is a minimum alternating path from f to v and u lies on this path then $p[f \text{ to } u]$ ⁴ is a minimum alternating path from f to u ⁵. This elementary property does not hold in non-bipartite graphs, e.g., if v lies on the minimum alternating path from f to u , but with the opposite parity. This is precisely the reason that the task of finding minimum length augmenting paths is considerably more difficult in non-bipartite graphs than in bipartite graphs.

In Figure 2, v is not BFS-honest on $\text{oddlevel}(a)$, $\text{oddlevel}(b)$ and $\text{evenlevel}(c)$ paths; it occurs at length 9 on the first and at length 11 on the other two, even though $\text{oddlevel}(v) = 7$. Thus shortest paths to a , b and c , of appropriate parity, involve longer and longer odd length paths to v . Furthermore, this is not just an academic exercise: Suppose this graph had another edge (c, d) , where d is a new unmatched vertex. Then the only augmenting path uses the $\text{evenlevel}(c)$ path. Whereas short paths are easy to find in a graph, finding long paths is intractable, e.g. Hamiltonian path. Hence, at first sight, the problem of finding minimum length augmenting paths, which may involve paths to certain vertices that are much longer than the shortest path, appears to be intractable in general graphs. As stated in the Introduction, despite this, the remarkable combinatorial structure of matching allows for a very efficient algorithm.

Definition 2 (Tenacity of vertices and edges) Define the tenacity of vertex v , $\text{tenacity}(v) = \text{evenlevel}(v) + \text{oddlevel}(v)$. If (u, v) is an unmatched edge, its tenacity, $\text{tenacity}(u, v) = \text{evenlevel}(u) +$

⁴This denotes the part of p from f to u . Similarly $p[f \text{ to } u)$ denotes the part of p from f to the vertex just before u , etc.

⁵Consequently, an alternating BFS suffices for executing a phase in bipartite graphs, e.g., see Section 2.1 in [Vaz94].

$\text{evenlevel}(v) + 1$, and if it is matched, $\text{tenacity}(u, v) = \text{oddlevel}(u) + \text{oddlevel}(v) + 1$.

In Figure 1, the tenacity of each edge in the 5-cycle is 9 and the tenacity of the rest of the edges is ∞ . Figures 3 and 4 give the tenacity of vertices and edges, respectively, in a more interesting graph.

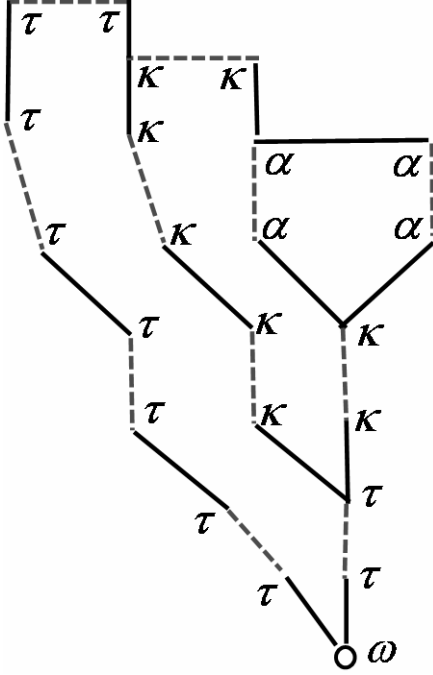


Figure 3: The tenacity of vertices is indicated; here $\alpha = 13$, $\kappa = 15$, $\tau = 17$ and $\omega = \infty$.

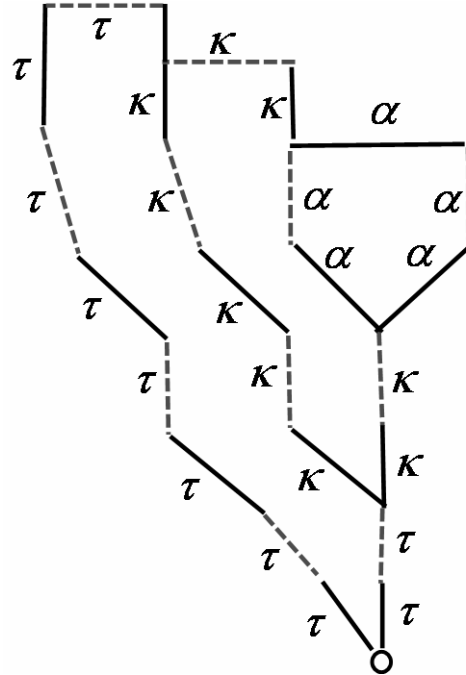


Figure 4: The tenacity of each edge is indicated; here $\alpha = 13$, $\kappa = 15$ and $\tau = 17$.

Lemma 3 *The following hold:*

1. If (u, v) is a matched edge, $\text{tenacity}(u) = \text{tenacity}(v) = \text{tenacity}(u, v)$.
2. If (u, v) is an unmatched edge, $\text{tenacity}(v) \leq \text{tenacity}(u, v)$.

Proof : If (u, v) is a matched edge, $\text{evenlevel}(v) = \text{oddlevel}(u) + 1$ and $\text{evenlevel}(u) = \text{oddlevel}(v) + 1$. And if (u, v) is an unmatched edge, $\text{oddlevel}(v) \leq \text{evenlevel}(v) + 1$. In each case, the lemma follows. $\square$

As a result of the first claim of Lemma 3, in several proofs below it will suffice to restrict attention to only one of the end points of a matched edge.

Definition 4 (Limited BFS-honesty) Let p be an $\text{evenlevel}(v)$ or $\text{oddlevel}(v)$ path starting at unmatched vertex f and let u lie on p . Then $|p[f \text{ to } u]|$ will denote the length of this path from f to u , and if it is even (odd) we will say that u is *even (odd) w.r.t. p* . We will say that u is BFS-honest w.r.t. p if $|p[f \text{ to } u]| = \text{evenlevel}(u)$ ($\text{oddlevel}(u)$) if u is even (odd) w.r.t. p .

The usefulness of tenacity is established in Theorem 5, which shows limited BFS-honesty even in the non-bipartite case.

Observe that in the graph of Figures 2 and 3, the vertices a , b and c are BFS-honest on all evenlevel and oddlevel paths to the vertices of tenacity α . (However, the vertices of tenacity α are not BFS-honest on oddlevel(a) and oddlevel(b) paths.)

Theorem 5 *Let p be an evenlevel(v) or oddlevel(v) path and let vertex $u \in p$ with $\text{tenacity}(u) \geq \text{tenacity}(v)$. Then u is BFS-honest w.r.t. p . Furthermore, if $\text{tenacity}(u) > \text{tenacity}(v)$ then $|p[f \text{ to } u]| = \text{minlevel}(u)$.*

Proof : Assume w.l.o.g that p is an evenlevel(v) path and that u is even w.r.t. p (by Lemma 3). Suppose u is not BFS-honest w.r.t. p , and let q be an evenlevel(u) path, i.e., $|q| < |p[f \text{ to } u]|$. First consider the case that $\text{evenlevel}(v) = \text{maxlevel}(v)$, and let r be a minlevel(v) path. Consider the first vertex of r that lies on $p[f \text{ to } v]$. If this vertex is even w.r.t. p then $\text{oddlevel}(u) \leq |r| + |p[u \text{ to } v]|$. Additionally, $\text{evenlevel}(u) < |p[f \text{ to } u]|$, hence $\text{tenacity}(u) < \text{tenacity}(v)$, leading to a contradiction. On the other hand, if this vertex is odd w.r.t. p then $\text{minlevel}(v) = |r| > \text{evenlevel}(u)$, because otherwise there is a shorter even path from f to v than $\text{evenlevel}(v)$. We combine the remaining argument along with the case that $\text{evenlevel}(v) = \text{minlevel}(v)$ below.

Consider the first vertex, say w , of q that lies on $p(u \text{ to } v]$ – there must be such a vertex because otherwise there is a shorter even path from f to v than $\text{evenlevel}(v)$. If w is odd w.r.t. p then we get an even path to v that is shorter than $\text{evenlevel}(v)$. Hence w must be even w.r.t. p . Then, $q[f \text{ to } w] \circ p[w \text{ to } u]$ is an odd path to u with length less than $\text{evenlevel}(v)$. Again we get $\text{tenacity}(u) < \text{tenacity}(v)$, leading to a contradiction. $\square$

3 The base of a vertex

Let v be vertex of tenacity $t < l_m$ and p be an evenlevel(v) or oddlevel(v) path starting at unmatched vertex f . Define the base of v w.r.t. p , denoted $b(p, v)$, to be the vertex of tenacity $> t$ that is furthest away from f on p . The main fact we will prove in this section is:

Theorem 6 *Let v be vertex of tenacity $t < l_m$. Then the set*

$$B = \{b(p, v) \mid p \text{ is an evenlevel}(v) \text{ or oddlevel}(v) \text{ path}\}$$

is a singleton.

We will need some definitions to prove a preliminary fact first. Let p be an alternating path starting at unmatched vertex f . Given two vertices u and w on p , if u is further away from f on p than w then we will say that u is *higher* than w . An alternating path that starts and ends at matched vertices of p and shares no other vertices of p is said to be a *segment on p* ; clearly, a segment will be of odd length. Let s be a segment on p whose endpoints are vertices u and v on p . Then we will say that all vertices on $p[u \text{ to } v]$ are *covered by s* . A vertex v on p is *covered by a set S of segments* if it is covered by one of the segments in S . A set S of segments on p is said to form a *flower on p* if this set satisfies the following recursive conditions:

1. S consists of a single segment, s , which starts and ends at even vertices of p .

2. $S = S' \cup \{s\}$, where S' forms a flower on p and one endpoint of segment s is covered by S' and the other is even w.r.t. p .
3. $S = S' \cup S'' \cup \{s\}$, where S' and S'' form flowers on p and one endpoint of segment s is covered by S' and the other by S'' .

In this section, we will denote the matched neighbor of matched vertex u by u' ; furthermore, if the edge (u, u') lies on p , we will assume that u is even w.r.t. p and u' is odd w.r.t. p . Let S be a flower on p and let u and w be the lowest and highest vertices of p covered by S . Then u and w will be called the *base* and *tip* of the flower, respectively. Observe that u and w will both be even w.r.t. p . The *length* of this flower will be the sum of lengths of all segments in S plus $|p[u \text{ to } w]|$. The proof of the next lemma follows via an easy induction based on the above-stated recursive definition of flower:

Lemma 7 *Let S form a flower on p with base u , and let w be any vertex covered by S . Then there are odd and even alternating paths from u to w , each of length at most the length of the flower.*

Let q be an alternating path that intersects p , possibly at several places. Each odd length alternating subpath of q that starts and ends at p will be called a *segment of q on p* . The proof of the following lemma is straightforward.

Lemma 8 *Let q be an alternating path that intersects p such that its first segment starts at even vertex w and last segment ends at even vertex u , where w is higher than u . Then w is covered by a flower formed by the segments of q on p .*

Let v be a vertex of tenacity $t < l_m$ and let p and q be $\text{evenlevel}(v)$ and $\text{oddlevel}(v)$ paths, respectively, starting at unmatched vertex f . Consider vertices of tenacity $> t$ that appear on both p and q ; by Lemma 5, each such vertex must be BFS-honest w.r.t. both p and q . Since $t < l_m$, f is one such vertex⁶. Among these vertices, let b be the highest. We remark that it is straightforward to show that neither $p(b \text{ to } v]$ nor $q(b \text{ to } v]$ can intersect $p[f \text{ to } b]$ – otherwise either b will have tenacity at most t or there will be a shorter path to v .

A matched edge (w, w') that lies on both $p(b \text{ to } v]$ and $q(b \text{ to } v]$ is said to be a *common edge*. If both these paths traverse this edge in the same direction then we will say that (w, w') is a *forward edge* and otherwise it is a *backward edge*. A common edge (w, w') is said to be a *separator* if the graph consisting of the vertices and edges of $p[b \text{ to } v] \cup q[b \text{ to } v]$ gets disconnected by the removal of this edge; clearly, such an edge must be a forward edge.

We next define three types of frontier edges. Let (w, w') be a separator edge and let (w, u') and (u, u') be the adjacent unmatched and matched edges, respectively, higher up on p . If (u, u') is not a separator edge then (w, w') is called a *separator frontier edge*. Next let (w, w') be a matched edge that is not a separator edge and such that $q(f \text{ to } w)$ has no intersection with $p(w \text{ to } v)$. Then if (w, w') is a forward (backward) edge, it will be called a *forward frontier (backward frontier)*. Figures 5, 7 and 9, show backward, forward and separator frontiers, respectively, and Figures 6, 8

⁶This is precisely the reason for assuming $t < l_m$ in this lemma and beyond; see also the Remark after the proof of Theorem 6.

and 10 show these three graphs redrawn in a manner that reveals their structure more easily. In Figure 9, the $\text{evenlevel}(v)$ and $\text{oddlevel}(v)$ paths both use edges (b, w') and (w', w) and the latter edge is a separator frontiers. The reason for drawing edge (b, w) is that it provides an $\text{oddlevel}(w)$ path.

The difference between a separator edge and a forward frontier edge is the following: in the former case, $(b \text{ to } v]$ does not intersect $p[f \text{ to } w)$ and in the latter case it does. In both cases, $|p[f \text{ to } w]| = |q[f \text{ to } w]|$, since otherwise one of the paths to v can be shortened.

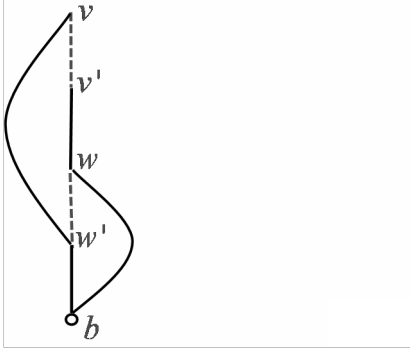


Figure 5: Edge (w, w') is a backward frontier.

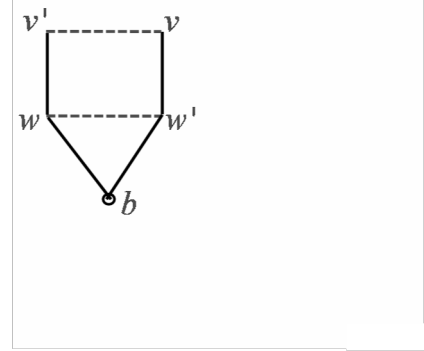


Figure 6:

Lemma 9 *Let v be a vertex of tenacity $t < l_m$ and let p and q be $\text{evenlevel}(v)$ and $\text{oddlevel}(v)$ paths, respectively, starting at unmatched vertex f , such that there are no separators on $p(b \text{ to } v]$ and $q(b \text{ to } v]$. Then $b(p, v) = b(q, v)$.*

Proof : We will prove that all vertices on $p(b \text{ to } v]$ and $q(b \text{ to } v]$ are of tenacity at most t , thereby proving the lemma. By Lemma 3, it suffices to prove this for vertices on $p(b \text{ to } v]$ that are even w.r.t. this path. For each such vertex, say u , we will prove that $\text{oddlevel}(u) \leq |q| + |p[u \text{ to } v]|$ thereby proving the claim, since $e(u) \leq |p[f \text{ to } u]|$.

Let (w, w') be the frontier edge that is closest to (u, u') , such that w is same as or above u . First consider the case that (w, w') is a backward frontier. If so, $q[f \text{ to } w] \circ p[w \text{ to } u]$ is an odd alternating path which obviously satisfies the length constraint.

Second consider the case that (w, w') is a forward frontier. Now, $|q[f \text{ to } w]| \geq |p[f \text{ to } w]|$, since otherwise we can get a shorter even path to v by splicing the first half of q with the second half of p at w . Since (w, w') is not a separator, $q[w \text{ to } v]$ must traverse an edge of p below (w, w') before reaching v . Let (x, x') be the last edge below (w, w') that $q[w \text{ to } v]$ traverses. Then (x, x') must be a backward edge, since otherwise $p[f \text{ to } x] \circ q[x \text{ to } v]$ will be a shorter odd path to v . If (x, x') is not the lowest edge of p traversed by $q[w \text{ to } v]$, then by Lemma 8, x will be covered by a flower formed by the segments of $q[w \text{ to } v]$, and again one can get a shorter odd path to v . Therefore, (x, x') must be the lowest edge of p traversed by $q[w \text{ to } v]$. By Lemma 8, w is covered by a flower formed by the segments of $q[w \text{ to } v]$. Let b' be the base of this flower.

Now, consider vertex u for which we need to place an upper bound on $\text{oddlevel}(u)$. If u lies below x or if u is not covered by a flower formed by the segments of $q[w \text{ to } v]$, then $q[f \text{ to } w]$ concatenated with an odd path from w to b' , through the flower covering w , concatenated with $p[b' \text{ to } u]$ is an odd path to u of the required length. Next assume that u is covered by a flower formed by the segments of $q[w \text{ to } v]$, with the base of this flower being b'' . Then $p[f \text{ to } b'']$ concatenated with an odd path from b'' to u through this flower is the required odd path; its length is bounded by

$$|p| + |q[w \text{ to } v]| \leq |q| + |p[u \text{ to } v]|,$$

since $|q[f \text{ to } w]| \geq |p[f \text{ to } w]|$ and we did not use any part of $q[f \text{ to } w]$. $\square$

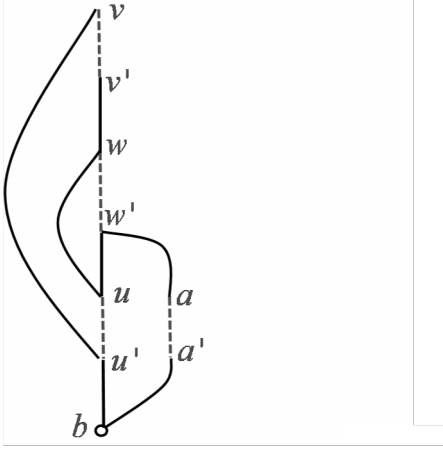


Figure 7: Edge (w, w') is a forward frontier.

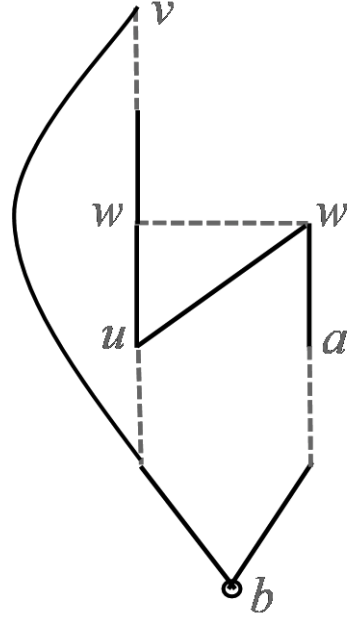


Figure 8:

Lemma 10 *Let v be a vertex of tenacity $t < l_m$ and let p and q be $\text{evenlevel}(v)$ and $\text{oddlevel}(v)$ paths, respectively, starting at unmatched vertex f . Then $b(p, v) = b(q, v)$.*

Proof : Lemma 9 dealt with the case that p and q have no separators. Next assume that they do and let (w, w') be the lowest separator frontier edge. We claim that w and w' must be BFS-honest on p and q – otherwise any $\text{evenlevel}(w)$ path must intersect $p(w \text{ to } v)$ and $q(w \text{ to } v)$ and one can then show that there must be a shorter even or odd path to v than p or q , respectively.

Next let us argue that all vertices on $p(b \text{ to } w]$ and $q(b \text{ to } w]$ are of tenacity at most t . As in Lemma 9, it suffices to restrict attention to vertices on $p(b \text{ to } w]$ that are even w.r.t. this path. For each such vertex, say u , we will prove that $\text{oddlevel}(u) \leq |q| + |p[u \text{ to } v]|$.

Since w lies on both p and q , and by the definition of vertex b , $\text{tenacity}(w) \leq t$. Let r be an $\text{oddlevel}(w)$ path; w.l.o.g. r starts at unmatched vertex f . Since w is BFS-honest w.r.t. p , $|r| = \text{tenacity}(w) - |p[f \text{ to } w]|$. Let h be the last vertex of $r[f \text{ to } w]$ that also lies on $p[f \text{ to } w]$.

First consider the easy case that $h = b$. If so, $r \circ p[w \text{ to } u]$ is an odd path to u of the required length.

Next assume that $h \neq b$ and h is even w.r.t. p . Now, for u on $p(h \text{ to } w)$, $r \circ p[w \text{ to } u]$ is an odd path to u of the required length. And for u on $p(b \text{ to } h]$, $q[f \text{ to } w] \circ r[w \text{ to } h] \circ p[h \text{ to } u]$ is the required path. Finally, assume that h is odd w.r.t. p . Then, for u on $p(b \text{ to } h]$, $r \circ p[w \text{ to } u]$ is the required path. And for u on $p(h \text{ to } w)$, $r \circ p[w \text{ to } u]$ is the required path.

The arguments given above carry over to even vertices on p that lie between any two separator frontier edges. The part of p between the highest separator frontier edge and v is similar to the no separators case and can be handled using the arguments given in Lemma 9. $\square$

Remark: It is easy to construct examples in which (w, w') is a separator edge, and w and w' are not BFS-honest on p and q . The claim made in the first para of the proof given above applies only to separator frontier edges.

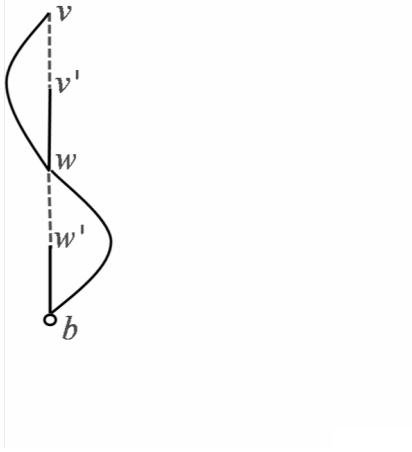


Figure 9: Edge (w, w') is a separator frontier.

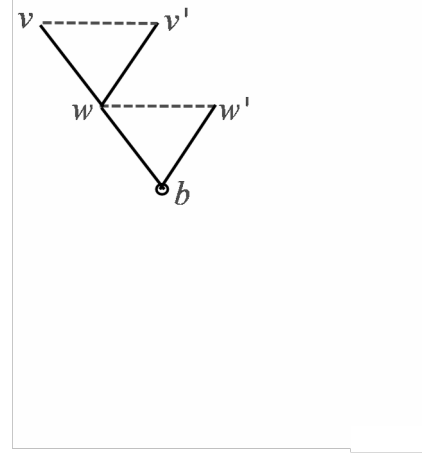


Figure 10:

Proof : (of Theorem 6) In Lemma 10, first fix p and vary q over all $\text{oddlevel}(v)$ paths and then fix q and vary p over all $\text{evenlevel}(v)$ paths to prove that all $\text{evenlevel}(v)$ and $\text{oddlevel}(v)$ paths starting at the same unmatched vertex have the same base. Next suppose that there are $\text{evenlevel}(v)$ and $\text{oddlevel}(v)$ paths starting from more than one unmatched vertex.

Let p and q be $\text{evenlevel}(v)$ paths starting from unmatched vertices f and f' , respectively. Since $t < l_m$, these paths must meet at a vertex that is odd w.r.t. both paths, say w' . Now $p[w' \text{ to } v]$ cannot intersect $q[f' \text{ to } w']$, since otherwise we can get a shorter even path to v or an augmenting path of length $< l_m$. Therefore, $q[f' \text{ to } w'] \circ p[w' \text{ to } v]$ is also an $\text{evenlevel}(v)$ path. Let us name it q' . By the fact established in the previous paragraph, $b(q', v) = b(q, v)$.

Suppose $b(p, v) \neq b(q', v)$; let $b(p, v) = b_1$ and $b(q', v) = b_2$. Clearly, b_1 lies on $p[f \text{ to } w']$ and b_2 lies on $q'[f' \text{ to } w']$. Therefore, $\text{tenacity}(w') \leq t$. It is easy to see that an $\text{evenlevel}(w')$ path together with $p[w' \text{ to } f]$ or $q'[w' \text{ to } f']$ will yield an augmenting path of length $< l_m$, leading to a contradiction. Therefore, $b(p, v) = b(q', v)$, hence proving the theorem. $\square$

Remark: The condition “ $t < l_m$ ” is essential in Theorem 6. To get a counter-example for $t = l_m$, consider a graph consisting of an alternating 3-cycle containing unmatched vertex f and a three-

length augmenting path from f to f' . In this graph, the tenacity three vertices in the cycle have no base.

Definition 11 (Base of a vertex, and iterated bases) For a vertex v of tenacity $t < l_m$ define its base to be the singleton vertex in the set defined in Theorem 6. We will denote it as $\text{base}(v)$. The iterated bases of v are defined as follows: Define $\text{base}^1(v) = \text{base}(v)$, and for $k \geq 1$, if $\text{tenacity}(\text{base}^k(v)) < l_m$, define $\text{base}^{k+1}(v) = \text{base}(\text{base}^k(v))$. For convenience, we will define $\text{base}^0(v) = v$ even though it is not an iterated base of v .

Definition 12 (Outer and inner vertices) A vertex v is said to be *outer* if $\text{evenlevel}(v) < \text{oddlevel}(v)$ and *inner* otherwise.

Clearly, the base of any vertex is outer and hence all iterated bases of a vertex are outer vertices. Clearly, $\text{base}^0(v) = v$ will be inner if v is inner; however, as stated above, $\text{base}^0(v)$ is not an iterated base of v . In the graph of Figures 2 and 3, the base of each vertex of tenacity α is a , tenacity κ is b , and tenacity τ is c , respectively. Additionally, $\text{base}^1(v) = a$, $\text{base}^2(v) = b$ and $\text{base}^3(v) = f$. Theorems 5 and 6 give:

Corollary 13 *For any vertex v , its iterated bases occur on every $\text{evenlevel}(v)$ and $\text{oddlevel}(v)$ path in a BSF-honest manner.*

Definition 14 (Shortest path from an iterated base to a vertex) Let v be a vertex of tenacity $t < l_m$ and let b be an iterated base of v , i.e., $b = \text{base}^k(v)$ for $k \in \mathbf{Z}^+$. By an $\text{evenlevel}(b; v)$ ($\text{oddlevel}(b; v)$) path we mean a minimum even (odd) length alternating path from b to v that starts with an unmatched edge.

Lemma 15 *Let v be a vertex of tenacity $t < l_m$ and let $b = \text{base}(v)$. Then every $\text{evenlevel}(v)$ ($\text{oddlevel}(v)$) path consists of an $\text{evenlevel}(b)$ path concatenated with an $\text{evenlevel}(b; v)$ ($\text{oddlevel}(b; v)$) path.*

Proof: Let p be an $\text{evenlevel}(b)$ path starting at unmatched vertex f and q be an $\text{evenlevel}(b; v)$ path. If their concatenation is longer than $\text{evenlevel}(v)$ then q must intersect p below b . Let (w, w') be the lowest matched edge of p used by q , where w' is even w.r.t. p . Now, using the same arguments as those in the proof of Theorem 5, one can show that if w is odd w.r.t. q then there is an even path from f to v that is shorter than $\text{evenlevel}(v)$ and if w' is odd w.r.t. q then there is a short enough odd path from f to b which gives $\text{tenacity}(b) \leq t$. $\square$

4 Blossoms and their properties vis-à-vis minimum length alternating paths

Definition 16 (Blossoms and their nesting depth) Blossoms will be defined recursively. Let b be an outer vertex and t be an odd number such that $\text{tenacity}(b) > t$ and $t < l_m$. We will

denote the blossom of tenacity t and base b by $\mathcal{B}_{b,t}$. Define $\mathcal{B}_{b,1} = \emptyset$ and define its nesting depth, $N(\mathcal{B}_{b,1}) = 0$. If $t \geq 3$, let $S_t = \{v \mid \text{tenacity}(v) = t \text{ and base}(v) = b\}$ and define

$$\mathcal{B}_{b,t} = S_t \cup \left(\bigcup_{v \in (S_t \cup \{b\}), v \text{ outer}} \mathcal{B}_{v,t-2} \right).$$

Define the nesting depth of this blossom, $N(\mathcal{B}_{b,t})$, to be $N(\mathcal{B}_{b,t-2})$ if $S_t = \emptyset$ and $N(\mathcal{B}_{b,t-2}) + 1$ otherwise.

It is obvious from Definition 16 that if $v \in \mathcal{B}_{b,t}$ then $\text{tenacity}(v) \leq t$. In the graph of Figures 2 and 3, the blossom $\mathcal{B}_{a,\alpha}$ consists of vertices of tenacity α , the blossom $\mathcal{B}_{b,\kappa}$ consists of vertices of tenacity α and κ , and the blossom $\mathcal{B}_{f,\tau}$ consists of vertices of tenacity α, κ and τ . The nesting depths of these blossoms are 1, 2 and 3, respectively.

Lemma 17 *Let $v \in \mathcal{B}_{b,t}$. Then $\exists k$ such that $1 \leq k \leq N(\mathcal{B}_{b,t})$ and $b = \text{base}^k(v)$. Furthermore, all the vertices $\text{base}(v), \dots, \text{base}^{k-1}(v)$ belong to $\mathcal{B}_{b,t}$.*

Proof : By induction on the nesting depth of blossom $\mathcal{B}_{b,t}$. If $N(\mathcal{B}_{b,t}) = 1$, by definition, $b = \text{base}(v)$. To prove the induction step, suppose $N(\mathcal{B}_{b,t}) = l + 1$. Now, if $v \in S_t$, i.e., $\text{tenacity}(v) = t$, then $\text{base}(v) = b$. Otherwise, $\exists u \in S_t$ such that $v \in \mathcal{B}_{u,t-2}$. Clearly $N(\mathcal{B}_{u,t-2}) \leq l$ and $\text{base}(u) = b$. By the induction hypothesis, $\exists l k$ such that $l \geq k \geq 1$ and $u = \text{base}^k(v)$. Hence, $b = \text{base}^{k+1}(v)$ and $k + 1 \leq l + 1$. Finally, by the induction hypothesis, $\text{base}(v), \dots, \text{base}^{k-1}(v)$ belong to $\mathcal{B}_{u,t-2}$. Hence $\text{base}(v), \dots, \text{base}^k(v)$ belong to $\mathcal{B}_{b,t}$. $\square$

Lemma 18 *Let $t \leq t' < \text{tenacity}(b)$ and $t' < l_m$, and let $\mathcal{B}_{b,t}$ and $\mathcal{B}_{b,t'}$ be two blossoms with the same base b . Then $\mathcal{B}_{b,t} \subseteq \mathcal{B}_{b,t'}$.*

Proof : 1. The proof is by induction on $t' - t$. The base case, i.e., $t = t'$, is obvious. Assume the induction hypothesis that $\mathcal{B}_{b,t} \subseteq \mathcal{B}_{b,t'-2}$. Now, by Definition 16 it is straightforward that $\mathcal{B}_{b,t'-2} \subseteq \mathcal{B}_{b,t'}$. Hence $\mathcal{B}_{b,t} \subseteq \mathcal{B}_{b,t'}$. $\square$

Lemma 19 *Let $\mathcal{B}_{b,t}$ be a blossom with base b and tenacity $t < l_m$, and v be a vertex satisfying $\text{base}^k(v) = b$ for some $k \geq 1$. If $t \geq \text{tenacity}(\text{base}^{k-1}(v))$ then $v \in \mathcal{B}_{b,t}$.*

Proof : The proof is by induction on k . In the base case, i.e., $k = 1$, $\text{base}(v) = b$. Let $\text{tenacity}(v) = r$, clearly $r \leq t$. By Definition 16, $v \in \mathcal{B}_{b,r}$ and by Lemma 18, $\mathcal{B}_{b,r} \subseteq \mathcal{B}_{b,t}$. Hence $v \in \mathcal{B}_{b,t}$.

For the induction step, let $\text{base}^{k-1}(v) = u$, $\text{tenacity}(u) = r \leq t$. By the induction hypothesis, $v \in \mathcal{B}_{u,r-2}$. Since $\text{base}(u) = b$, by Definition 16, $\mathcal{B}_{u,r-2} \subseteq \mathcal{B}_{b,r}$ and by Lemma 18, $\mathcal{B}_{b,r} \subseteq \mathcal{B}_{b,t}$. Hence $v \in \mathcal{B}_{b,t}$. $\square$

Lemma 20 *Let $\mathcal{B}_{b,t}$ and $\mathcal{B}_{b',t'}$ be two blossoms such that $b \in \mathcal{B}_{b',t'}$. Then $\mathcal{B}_{b,t} \subset \mathcal{B}_{b',t'}$.*

Proof : By Lemma 17, there is a $k \geq 1$ such that $b' = \text{base}^k(b)$ and $\text{base}^1(b), \dots, \text{base}^{k-1}(b) \in \mathcal{B}_{b',t'}$. Clearly, $t' \geq \text{tenacity}(\text{base}^{k-1}(b))$. To prove the statement, we will apply induction on k .

For the base case, i.e., $k = 1$, let $\text{tenacity}(b) = r$. Clearly, $t < r \leq t'$ and $\mathcal{B}_{b,t} \subset \mathcal{B}_{b,r-2}$. By Definition 16, $\mathcal{B}_{b,r-2} \subset \mathcal{B}_{b',r}$, where the containment is proper since b is not in the first blossom but it is in the second one. By Lemma 18, $\mathcal{B}_{b',r} \subseteq \mathcal{B}_{b',t'}$. Hence $\mathcal{B}_{b,t} \subset \mathcal{B}_{b',t'}$.

For the induction step assume $\text{base}^{k+1}(b) = b'$. Let $\text{base}^k(b) = v$, and let $\text{tenacity}(v) = r$. Since $v \in \mathcal{B}_{b',t'}$, $r \leq t'$. Clearly, $\text{tenacity}(\text{base}^{k-1}(v)) \leq r - 2$. Therefore, by Lemma 19, $b \in \mathcal{B}_{v,r-2}$. Furthermore, since $\text{base}^k(b) = v$, by the induction hypothesis, $\mathcal{B}_{b,t} \subset \mathcal{B}_{v,r-2}$.

Since $\text{base}(v) = b'$, by Definition 16, $\mathcal{B}_{v,r-2} \subseteq \mathcal{B}_{b',r}$. Since $r \leq t'$, $\mathcal{B}_{b',r} \subseteq \mathcal{B}_{b',t'}$. Hence, $\mathcal{B}_{b,t} \subset \mathcal{B}_{b',t'}$. $\square$

Theorem 21 *The set of blossoms in G forms a laminar family, i.e., two blossoms are either disjoint or one is contained in the other.*

Proof : Suppose v lies in blossoms $\mathcal{B}_{b,t}$ and $\mathcal{B}_{b',t'}$. If $b = b'$, we are done by the first claim in Lemma 18. Next assume that $b \neq b'$. Then by Lemma 20, $b = \text{base}^k(v)$ and $b' = \text{base}^l(v)$; assume $k < l$. By the second claim in Lemma 20, $b = \text{base}^k(v) \in \mathcal{B}_{b',t'}$. Finally, by the second claim in Lemma 18, $\mathcal{B}_{b,t} \subset \mathcal{B}_{b',t'}$. $\square$

For the next theorem, we will need the following definition. Let $k = \min_l \{l \in \mathbf{Z}^+ \mid \text{tenacity}(\text{base}^l(v)) \geq t\}$ and let $b = \text{base}^k(v)$. Then we will say that b is the first iterated base of v having tenacity at least t .

Theorem 22 *Let $\text{tenacity}(v) = t < l_m$, $\text{base}(v) = b$, and let p be an $\text{evenlevel}(b; v)$ or $\text{oddlevel}(b; v)$ path. Then the following hold:*

1. *Let vertex u lie on p with $u \neq b$ and let b' be the first iterated base of u having tenacity at least t . If b' lies on p then $p[b' \text{ to } u]$ is an $\text{evenlevel}(b'; u)$ or $\text{oddlevel}(b'; u)$ path, depending on the parity of $|p[b' \text{ to } u]|$.*
2. *Let u and b' satisfy the above-stated conditions. Then b' lies on p .*
3. *All vertices of p are in $\mathcal{B}_{b,t} \cup \{b\}$.*
4. *Let vertex u lie on p with $u \neq b$. Then all iterated bases of u , until b , lie on p .*

Proof : By Lemma 3 we may assume w.l.o.g. that p be an $\text{evenlevel}(b; v)$ path. We will prove the four claims by strong induction on t . For the base case, let t be the smallest tenacity of a vertex in G . In this case all vertices on p , other than b , will be of tenacity t and will have base b . Hence all the claims are satisfied. We prove the induction step below.

(1). If $\text{tenacity}(u) = t$ then $b' = b$ and by Theorem 5, u is BFS-honest w.r.t. p . Now the claim follows by Corollary 13 and Lemma 15.

Therefore if u does not satisfy the claim, $t(u) < t$. Among the vertices that do not satisfy the claim let u be the last one on p . By Lemma 3, u will be even w.r.t. p and by the choice of

$b', u \in \mathcal{B}_{b',t-2}$. By the induction hypothesis applied to claim (3), every $\text{evenlevel}(b'; u)$ path is contained in $\mathcal{B}_{b',t-2} \cup \{b'\}$.

Let w be any vertex on $p(u \text{ to } v)$. Either $\text{tenacity}(w) = t$ and $\text{base}(w) = b$ or by the choice of u , w is of tenacity less than t and satisfies the condition of this claim. In the latter case, let a be the first iterated base of w having tenacity at least t . Then, $p[a \text{ to } w]$ is contained in $\mathcal{B}_{a,t-2} \cup \{a\}$. By Theorem 21, blossom $\mathcal{B}_{a,t-2}$ is disjoint from $\mathcal{B}_{b',t-2}$. Therefore, any $\text{evenlevel}(b'; u)$ path does not intersect $p(u \text{ to } v)$. Hence an $\text{evenlevel}(b') \circ \text{evenlevel}(b'; u) \circ p[u \text{ to } v]$ path is a shorter path than p , leading to a contradiction.

(2). If $t(u) = t$ then u is BFS-honest w.r.t. p and by Corollary 13, b' lies on p . Therefore if u does not satisfy the claim, $t(u) < t$. Among the vertices that do not satisfy the claim let u be the last one on p . By Lemma 3, u will be even w.r.t. p and by the induction hypothesis applied to claim (3), the path $\text{evenlevel}(b'; u)$ is contained in $\mathcal{B}_{b',t-2} \cup \{b'\}$. Now there are two cases:

Case 1: The $\text{evenlevel}(b')$ path does not intersect $p(u \text{ to } v)$.

In this case, the path $\text{evenlevel}(u) \circ p[u \text{ to } v]$ is a shorter path than p , leading to a contradiction.

Case 2: The $\text{evenlevel}(b')$ path intersects $p(u \text{ to } v)$.

Let w be the first intersection of the $\text{evenlevel}(b')$ path with $p(u \text{ to } v)$. Now w must be even w.r.t. p , since otherwise we can obtain a shorter even path to v . Furthermore, $\text{tenacity}(w) = t$ since the $\text{evenlevel}(b')$ path must enter any blossom of tenacity $t - 2$ through its base. Let q be the path obtained by concatenating the part of the $\text{evenlevel}(b')$ path from w to b' together with an $\text{oddlevel}(b'; u)$ path. Since every $\text{oddlevel}(u)$ path consists of an $\text{evenlevel}(b')$ path concatenated with an $\text{oddlevel}(b'; u)$ path and $p[w \text{ to } u]$ does not go through b' , $p[w \text{ to } u]$ must be longer than q . Hence by replacing $p[w \text{ to } u]$ by q in p yields a shorter path than p , leading to a contradiction.

(3). By claim (2), if u is on p and $u \neq b$, then the first iterated base of u having tenacity at least t , say b' , lies on p , and by claim (1), $p[b' \text{ to } u]$ is an $\text{evenlevel}(b'; u)$ or $\text{oddlevel}(b'; u)$ path, depending on the parity of $|p[b' \text{ to } u]|$. Therefore, one of the following three must hold: $u = b$ or $\text{tenacity}(u) = t$ and $\text{base}(u) = b$ or $u \in \mathcal{B}_{b',t-2}$ where $b' = b$ or $\text{tenacity}(b') = t$ and $\text{base}(b') = b$. In all cases, $u \in (\mathcal{B}_{b,t} \cup \{b\})$. The claim follows.

(4). If $\text{tenacity}(u) = t$, the claim is obvious. Otherwise, $\text{tenacity}(u) < t$ and by claim (2), b' lies on p . Now by claim (1), $p[b' \text{ to } u]$ is an $\text{evenlevel}(b'; u)$ or $\text{oddlevel}(b'; u)$ path, depending on the parity of $|p[b' \text{ to } u]|$. Hence, we are done by Corollary 13 and the induction hypothesis. $\square$

Remark: It is interesting to note that perhaps the most elementary claim in Theorem 22 appears to be the following subclaim of (4): If vertex u lies on p , with $u \neq b$, then $\text{base}(u)$ lies on p . However, all our attempts at proving this fact first failed.

Consider the $\text{oddlevel}(a)$ and $\text{evenlevel}(c)$ paths in Figure 2. Vertex v lies on both and is not BSF-honest w.r.t. either path; the iterated bases of v are a, b and f . Now, $\text{base}(a) = b$ and $\text{base}(c) = f$. Let p be an $\text{oddlevel}(b; a)$ path and q be an $\text{evenlevel}(f; c)$ path. Clearly, $p \in \mathcal{B}_{b,15} \cup \{b\}$ and $q \in \mathcal{B}_{f,17} \cup \{f\}$. The relevant iterated bases of v , namely a and b lie on p and a, b and f lie on q . Finally, $p[a \text{ to } v]$ is an $\text{evenlevel}(a; v)$ path and $q[b \text{ to } v]$ is an $\text{evenlevel}(b; v)$ path despite the fact that v is not BSF-honest w.r.t. both p and q .

Theorem 22 leads to the startling fact proved in Theorem 23; this fact also underlines the central importance of the notion of base of a vertex. We first need some definitions. Let us say that vertex v has all iterated bases defined if for some $k \in \mathbf{Z}^+$, $\text{base}^k(v)$ is an unmatched vertex, and vertex v is useful if it lies on a minimum length augmenting path. It is easy to see that any useful

vertex has all iterated bases defined; however, the reverse may not hold. Clearly, in both cases, $\text{tenacity}(v) < l_m$.

Theorem 23 *Let v be a vertex that has all iterated bases defined and let p be an $\text{evenlevel}(v)$ or $\text{oddlevel}(v)$ path. Then for each vertex u that lies on p , all iterated bases of u lie on p .*

Proof : First, it is easy to see that vertex u has all iterated bases defined. If u lies on $p[\text{base}(v) \text{ to } v]$, then by claim (4) in Theorem 22 and Corollary 13, the theorem is true for u .

Assume that $\text{base}^k(v)$ is an unmatched vertex, where $k \in \mathbf{Z}^+$. If $u = \text{base}^k(v)$, the claim is clearly true. Next assume that u lies on

$p[\text{base}^{l+1}(v) \text{ to } \text{base}^l(v)]$, where $1 \leq l < k$. Since $\text{base}^l(v)$ is BFS-honest w.r.t. p , $p[\text{base}^{l+1}(v) \text{ to } \text{base}^l(v)]$ is an $\text{evenlevel}(\text{base}^{l+1}(v); \text{base}^l(v))$ path, and again we are done by claim (4) in Theorem 22 and Corollary 13. $\square$

As an illustration of Theorem 23, consider the $\text{evenlevel}(c)$ path, say p , in the graph of Figure 2. Vertex v lies on p and so do $a = \text{base}(v)$, $b = \text{base}^2(v)$ and $f = \text{base}^3(v)$.

5 Bridges and their support

Definition 24 (Predecessor, prop and bridge) Consider a $\text{minlevel}(v)$ path and let (u, v) be the last edge on it; clearly, (u, v) is matched if v is outer and unmatched otherwise. In either case, we will say that u is a predecessor of v and that edge (u, v) is a prop. An edge that is not a prop will be defined to be a bridge.

The three horizontal edges in Figure 2 are bridges and the rest of the edges of this graph are props.

Theorem 25 *Let v be a vertex of tenacity, $t \leq l_m$, and let p be a $\text{maxlevel}(v)$ path. Then there exists a unique bridge of tenacity t on p .*

Proof : Let p start at unmatched vertex f . If $t < l_m$, let $\text{base}(v) = b$. By Lemma 15, p consists of an $\text{evenlevel}(b)$ path concatenated with an $\text{evenlevel}(b; v)$ path. Denote the latter by q . If $t = l_m$, let $q = p$.

By Theorem 5, each vertex u of tenacity t on q is BFS-honest w.r.t. p . Let us partition these vertices into two sets: S_1 (S_2) consists of vertices u such that $|p[f \text{ to } u]| = \text{minlevel}(u)$ ($= \text{maxlevel}(u)$). Let $S'_1 = S_1 \cup \{b\}$. Clearly $v \in S_2$. Hence S'_1 and S_2 are both non-empty. Let a be the vertex in S'_1 having the largest minlevel and c be the vertex in S_2 having the smallest maxlevel. Now there are two cases.

Case 1: a and c are adjacent on p and (a, c) is a matched edge. By Lemma 3, $\text{tenacity}(a) = \text{tenacity}(c) = \text{tenacity}(a, c)$. Furthermore, for both a and c , their minlevel is their oddlevel, therefore (a, c) is not a prop. Hence it is a bridge of tenacity t .

Case 2: In the remaining case, a and c must both be outer vertices, and in general, there may be several vertices of tenacity less than t between a and c on p . By Theorem 22, the first iterated base

of these vertices having tenacity at least t must be a or c . Furthermore, by the third statement of Theorem 22, the ones having base a must be contiguous on p and so must be the ones having base c . Let a' be the last vertex on p whose iterated base is a ; if there is no such vertex, let $a' = a$. Similarly, let c' be the first vertex on p whose iterated base is c ; if there is no such vertex, let $c' = c$. Then (a', c') will be an unmatched edge of p . We will show that it is a bridge of tenacity t .

By Theorem 22, $p[a \text{ to } a']$ is an $\text{evenlevel}(a; a')$ path and $p[c \text{ to } c']$ is an $\text{evenlevel}(c; c')$ path. Now, $\text{tenacity}(a', c') = \text{evenlevel}(a') + \text{evenlevel}(c') + 1$. Substituting $\text{evenlevel}(c) = t - \text{oddlevel}(u)$, $\text{evenlevel}(a') = \text{evenlevel}(a) + \text{evenlevel}(a; a')$ and $\text{evenlevel}(c') = \text{evenlevel}(c) + \text{evenlevel}(c; c')$, we get:

$$\text{tenacity}(a', c') = \text{evenlevel}(a) + \text{evenlevel}(a; a') + t - \text{oddlevel}(u) + \text{evenlevel}(c; c') + 1 = t.$$

Clearly, a gets its minlevel from its matched neighbor and if $a' \neq a$, a' gets its minlevel from the blossom $\mathcal{B}_{a,t-2}$. Similarly, c gets its minlevel from its matched neighbor and if $c' \neq c$, c' gets its minlevel from the blossom $\mathcal{B}_{c,t-2}$. Therefore (a', c') is not a prop. Hence it is a bridge of tenacity t .

Finally, we show that none of the remaining edges on q is a bridge of tenacity t . Consider an edge (i, j) on $p[b \text{ to } a]$, with i below j on p . If $\text{tenacity}(j) = t$ then (i, j) must be a prop and if $t(j) < t$ then j lies in a blossom nested in $\mathcal{B}_{b,t}$ and $t(i, j) < t$. A similar argument holds for the edges on $p[c \text{ to } v]$. $\square$

Definition 26 (The support of a bridge) Let (u, v) be a bridge of tenacity $t \leq l_m$. Then, its support is defined to be $\{w \mid \text{tenacity}(w) = t \text{ and } \exists \text{ a maxlevel}(w) \text{ path containing } (u, v)\}$.

In the graph of Figures 2, 3 and 4, the supports of the bridges of tenacity α, κ and τ are the set of vertices of tenacity α, κ and τ , respectively.

6 Double depth first search

Double depth first search (DDFS) consists of two coordinated depth first searches. The MV algorithm executes DDFS on the given graph, G ; however, for ease of exposition we will describe it in the simplified setting of a directed, layered graph H .

The layered graph: The vertices of H are partitioned into $h + 1$ layers, $l_h, \dots, l_0$, with l_h being the highest and l_0 the lowest layer. Each directed edge runs from a higher to a lower layer. Layer l_h contains two vertices, r and g , for *red* and *green*. The edges of H are such that from each vertex there is a path to a vertex in l_0 . A vertex v will be called a *bottleneck* if every path from r to l_0 and every path from g to l_0 contains v . Observe that v may be in layer l_0 . Among the bottlenecks, if there are any, the one having highest level will be called the *highest bottleneck*. If so, we will denote it by b . Let V_b (E_b) be the set of all vertices (edges) that lie on all paths from r and g to b . If there are no bottlenecks, there must be distinct vertices r_0 and g_0 in layer l_0 and disjoint paths from r to r_0 and g to g_0 . If so, let E_p be the set of all edges that lie on all paths from r to r_0 and from g to g_0 .

The objective of DDFS: The purpose of DDFS is to find the highest bottleneck if one exists, and otherwise, to find distinct vertices r_0 and g_0 in layer l_0 and disjoint paths from r to r_0 and g

to g_0 . The running time of DDFS needs to be a function of the output in the following manner: in the former case, DDFS needs to run in time $O(|E_b|)$ and in the latter case, it needs to run in time $O(|E_p|)$. In the former case, DDFS also needs to partition the vertices in $V_b - \{b\}$ into two sets R and G , with $r \in R$ and $g \in G$. Furthermore DDFS needs to find two trees, T_r and T_g , rooted at r and g , such that the set of vertices visited by them is $R \cup \{b\}$ and $G \cup \{b\}$, respectively. The two trees are found by the two DFSs, called *red DFS* and *green DFS*, respectively.

The two DFSs and their coordination: The two DFSs maintain their own stacks, S_r and S_g , which start with r and g , respectively. At any point in the search, each stack contains the vertices that have been visited by the corresponding DFS but have not yet backtracked from. Each DFS performs the usual operations, with one important modification. The latter is described below when we give the rules for coordinating the two DFSs. Because edges in H go from higher to lower levels, neither DFS will encounter back edges. The two DFSs start with their center of activity at r and g , respectively. Assume that the center of activity of a DFS is at u and it searches along edge (u, v) . If v is not yet visited by either search, it pushes v onto its stack and moves its center of activity to v . In this case, u is declared *parent of v* . If v is already visited by either search, it considers the next unsearched edge incident at u – see below an exception, which is also the important modification mentioned above. If all edges incident at u have already been searched, it pops u from its stack and moves the center of activity to the parent of u .

We next give the rules for coordinating the two DFSs. To meet the running time requirement, we posit that if b is the highest bottleneck in H , then neither DFS will search along any edges below b . This gives our first rule: as soon as the center of activities of the two DFSs are at different levels, the one that is higher must move to catch up. If both are at the same level, we adopt the convention that red moves first. The exception mentioned above happens when one DFS searches along edge (u, v) and v happens to be the center of activity of the other DFS. In this case, v could potentially be a bottleneck and the two DFSs first need to determine whether it is. Furthermore, if v is not a bottleneck, the two DFSs need to determine which tree gets v .

When the two DFSs meet at a vertex: The procedure followed by the two DFSs at this point is the following, independent of which one got to v first. Let us assume that the red and green DFSs reached v via edges (v_r, v) and (v_g, v) , respectively. First the green DFS backtracks from v and tries to reach a vertex, say w , with $w \neq v$ and $\text{level}(w) \leq \text{level}(v)$. If green succeeds, red moves its center of activity to v and it adds v to R and edge (v_r, v) to T_r , and DDFS proceeds. If the green fails, its stack, S_g , must be empty. Next, the red DFS backtracks from v and tries to reach a vertex, say w , with $w \neq v$ and $\text{level}(w) \leq \text{level}(v)$. If red succeeds, green moves its center of activity to v ; however, it does not push v onto S_g , since it has already backtracked from v . In addition, it adds v to G and edge (v_g, v) to T_g , and DDFS proceeds. If red also fails, then its stack also must be empty and v is indeed the required bottleneck. If so, v is added to both R and G and edges (v_r, v) and (v_g, v) are added to T_r and T_g , respectively, and DDFS halts. If DDFS does not find a bottleneck, then eventually the two DFSs must find distinct vertices in l_0 .

Theorem 27 *DDFS accomplishes the objectives stated above in the required time.*

Proof : The main difference between a usual DFS and the two DFSs implemented in DDFS arises when the two DFSs meet at a vertex, say v at layer l_j . Observe that once one DFS reaches a vertex at layer l , say, at every future point, the center of activity of at least one DFS will be at level l or lower. Therefore, since both DFSs just moved from higher layers to layer l_j , no other

vertices at layer l_j or lower have yet been explored. Therefore, if v is not a bottleneck, there is an alternative path that reaches layer l_j or lower and which has not been explored so far. Since at this point both DFSs will consider all ways of finding such an alternative, they will find one and DDFS will proceed. On the other hand, if v is a bottleneck, there is no such alternative, and after considering all possibilities, both stacks will become empty and v will be declared the bottleneck.

If there is no bottleneck in H , by the arguments given above, the two DFSs will not get stuck at any vertex. Hence, one of them must reach a vertex at layer l_0 , say v . Since v is also not a bottleneck, even if the two DFSs meet at v , one of them will find a way of reaching another vertex at layer l_0 .

Clearly, the only edges searched by DDFS are those in E_b in the first case and E_p in the second. Furthermore, each such edge is examined at most twice, once in the forward search and once during backtrack. Hence DDFS accomplishes the stated objectives in the required time. $\square$

7 The algorithm

The MV algorithm can be viewed as an intertwining of an alternating BSF (similar to the one used for bipartite graphs) with a number of DDFSs. The first part of the algorithm for a phase finds the evenlevels and oddlevels of vertices and marks the graph in an appropriate manner. This part is organized in search levels, the first one being search level 0. Let $j_m = (l_m - 1)/2$, where l_m is the length of a minimum length augmenting path in G . Then during search level j_m , a maximal set of augmenting paths of length l_m is found and the current phase terminates. If $l_m = \infty$, i.e., there are no augmenting paths, the algorithm will reach a search level at which it has found the minlevels and maxlevels of all vertices reachable via alternating paths from the unmatched vertices. At this point it will halt and output the current matching, which will be maximum.

7.1 Synchronization of events, and procedures MIN and MAX

As stated in the Introduction, a key idea in the MV algorithm is the precise synchronization of events – we describe this next. During search level i procedure MIN finds all vertices, v , having $\text{minlevel}(v) = i + 1$ and assigns these vertices their minlevels. For each edge MIN scans, it also determines whether it is a prop or a bridge. After MIN is done, procedure MAX finds all vertices, v , having $\text{tenacity}(v) = 2i + 1$ and assigns these vertices their maxlevels; their minlevels are at most i and are already known. See Algorithm 1 for a summary of the main steps.

Algorithm 1**At search level i :****1. MIN:****For** each level i vertex, u , search along appropriate parity edges incident at u .**For** each such edge (u, v) , if (u, v) has not been scanned before **then****If** $\text{minlevel}(v) \not\leq i + 1$ **then** $\text{minlevel}(v) \leftarrow i + 1$ Insert u in the list of predecessors of v .Declare edge (u, v) a prop.**Else** declare (u, v) a bridge.**End For****End For****2. MAX:**Find the support of each bridge of tenacity $2i + 1$ using DDFS.**For** each vertex v in the support: $\text{maxlevel}(v) \leftarrow 2i + 1 - \text{minlevel}(v)$ **End For**

In each search level, procedure MIN executes one step of alternating BFS as follows. If i is even (odd), it searches from all vertices, u , having an evenlevel (oddlevel) of i along incident unmatched (matched) edges, say (u, v) . If edge (u, v) has not been scanned before, MIN will determine if it is a prop or a bridge. If v already been assigned a minlevel of at most i , then (u, v) is a bridge. Otherwise, v is assigned a minlevel of $i + 1$, u is declared a predecessor of v and edge (u, v) is declared a prop. Note that if i is odd, v will have only one predecessor – its matched neighbor. But if i is even, v may have one or more predecessors.

The algorithm also constructs for each odd number t , the list of bridges of tenacity t , $B(t)$. For each edge that is declared a bridge, as soon as the appropriate levels of its two endpoints are known, as stated in Definition 2, its tenacity is ascertained and it is inserted into the appropriate list. Lemma 31 below proves that by the end of execution of procedure MIN at search level i , the algorithm would have determined the tenacity of all bridges of tenacity $2i + 1$.

At this point, procedure MAX uses DDFS to find the support of each bridge in the set $B(2i + 1)$. This yields all vertices of tenacity $2i + 1$ and their maxlevel can be calculated as indicated in Algorithm 1. Knowing maxlevels of these vertices helps the algorithm determine the tenacity of bridges incident at them.

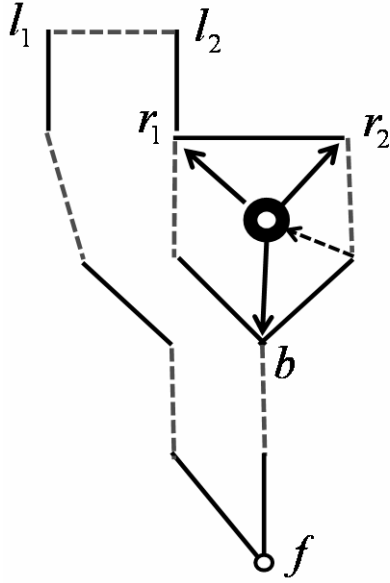


Figure 11: A new petal-node is created after DDFS on bridge (r_1, r_2) .

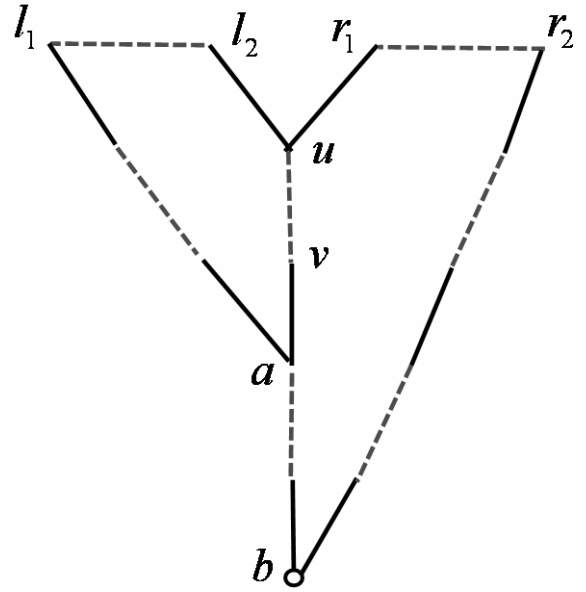


Figure 12: Vertices u and v are in the support of both bridges of tenacity of 11.

7.2 Running DDFS on G

We now describe how DDFS is executed on the given graph, G ; as stated in Section 6, the graph H is a considerably simplified version of G . For graph H , we specified its vertices, including a layer for each vertex, and its edges. We will specify the vertices and edges gradually below; however, at the outset we state that the layer of any vertex will be its minlevel.

In the graph of Figure 11, MAX will perform DDFS on bridge (r_1, r_2) , of tenacity 9, during search level 4, by starting two DFSs at vertices r_1 and r_2 , respectively. We first state a preliminary rule for determining the edges of the corresponding graph H – the preliminary rule will suffice for this first DDFS. If the center of activity of a DFS is at u then it must search along all edges (u, v) where v is a predecessor of u .

Clearly, this DDFS will terminate with the bottleneck b . It will visit the four vertices which constitute the support of bridge (r_1, r_2) ; observe that b is not in the support of bridge (r_1, r_2) . These four vertices form the blossom $\mathcal{B}_{b,9}$. However, in general, DDFS may not find an entire blossom but only a part of it. The set of vertices it does find will be called a *petal*; a blossom, in general, is a union of petals. Thus the four vertices of tenacity 9 are said to belong to the new petal.

At this point, the algorithm creates a new node, called a *petal-node*; this has the shape of a donut in Figure 11. The four vertices of the new petal point to the petal-node; to avoid cluttering Figure 11, only one vertex is pointing to the petal-node. The bottleneck, b , is called the *bud* of the petal. The new petal-node points to the two endpoints of its bridge, r_1 and r_2 , and to its bud, b ; the reason for the former will be clarified in Section 7.3 and for the latter below.

Definition 28 (The bud of a vertex) If vertex v is in a petal and the bud of this petal is b then will say that the *bud of v* is b , written as $\text{bud}(v) = b$; $\text{bud}(v)$ is undefined if v is not

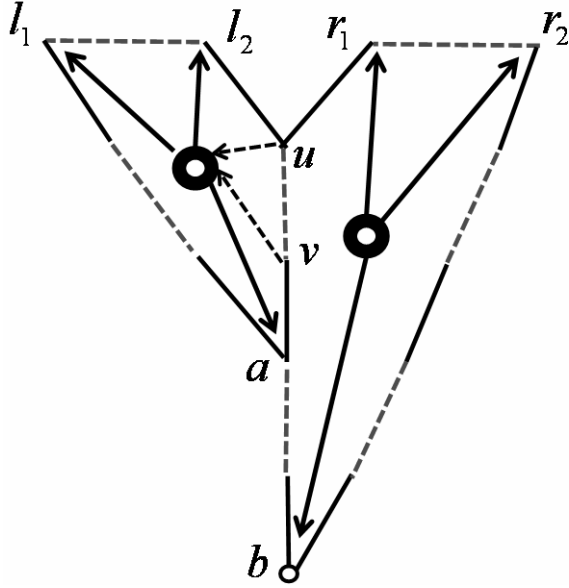


Figure 13: DDFS is performed on the left bridge first, then right.

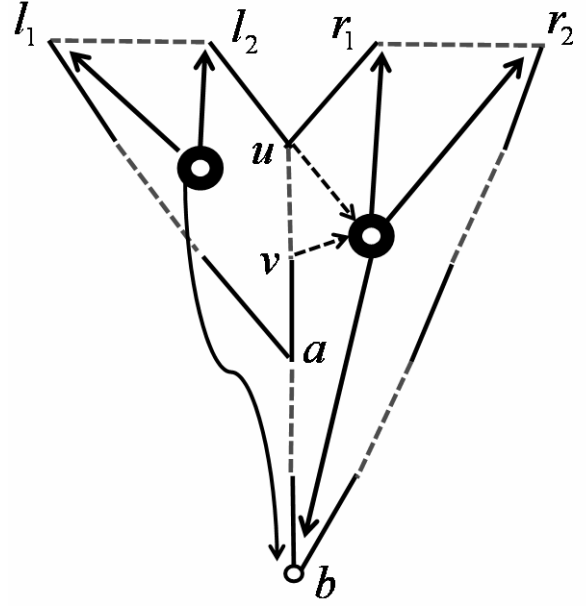


Figure 14: DDFS is performed on the right bridge first, then left.

in a petal. Next we define the function $\text{bud}^*(v)$. If v is not in any petal, $\text{bud}^*(v) = v$ else $\text{bud}^*(v) = \text{bud}^*(\text{bud}(v))$.

Observe that the bud of a petal is always an outer vertex. Unlike $\text{base}(v)$ which was defined graph-theoretically and independent of the run of the algorithm, $\text{bud}(v)$ depends on the manner in which the algorithm breaks ties; for examples, see below. Additionally, $\text{bud}^*(v)$ not only depends on the particular run of the algorithm, it keeps changing as the algorithm proceeds. At any point in the algorithm, its latest value is used.

In Figure 11, a second DDFS is performed on bridge (l_1, l_2) , of tenacity 11, during search level 5. To describe this DDFS, we need to state the complete rule for defining edges of the corresponding graph H : if the center of activity of a DFS is at u and it searches along edge (u, v) , where v is a predecessor of u , then DFS must move the center of activity to $\text{bud}^*(v)$. Thus, when the DFS which starts at l_2 searches along edge (l_2, r_1) , it moves the center of activity to b . It does so by following the pointer from r_1 to its petal-node and from the petal-node to the bud of this petal-node. In the process, the center of activity has jumped down more than one layer. The edges of H were allowed to jump down an arbitrary number of layers in order to model this.

This DDFS will end with bottleneck f . The new petal is precisely the support of bridge (l_1, l_2) and consists of the eight vertices of tenacity 11 in Figure 11, which includes b . Once again, a new petal-node is created and these eight vertices point to it. In addition, the petal-node points to l_1, l_2 and to f . Observe that the blossom $\mathcal{B}_{f,11}$ consists of these eight vertices and the four vertices of blossom $\mathcal{B}_{b,9}$.

Next consider the graph of Figure 12 which has two bridges of tenacity 11, (l_1, l_2) and (r_1, r_2) . Observe that vertices u and v are in the support of both these bridges. Hence, the support of bridges need not be disjoint. Observe also that the base of these vertices is not a but b ; note that $\text{tenacity}(a) = 11$. Moreover, there is only one blossom in this graph, i.e., $\mathcal{B}_{b,11}$.

MAX will perform DDFS on these two bridges in arbitrary order during search level 5. Figure 13 shows the result of performing DDFS on (l_1, l_2) before (r_1, r_2) . The first DDFS will end with bottleneck a . The new petal is precisely the support of (l_1, l_2) , consisting of six vertices of tenacity 11, including u and v . The second DDFS, performed on (r_1, r_2) , will end with bottleneck b and the new petal is precisely the difference of supports of (r_1, r_2) and (l_1, l_2) , i.e., the remaining eight vertices of tenacity 11, including a . During this DDFS, when the DFS starting at r_1 searches along edge (r_1, u) , it realizes that u is already in a petal and it jumps to a , the bud of this petal. This ensures that a vertex is included in at most one petal. In general, at the end of DDFS on bridge (u, v) , the new petal will be the support of (u, v) minus the supports of all bridges processed thus far in this search level.

Figure 14 shows the result of performing DDFS on (r_1, r_2) before (l_1, l_2) . The first petal is the support of (r_1, r_2) , i.e., 10 vertices of tenacity 11, including a , u and v . The second petal is the difference of supports of (l_1, l_2) and (r_1, r_2) , i.e., 4 vertices of tenacity 11. In both cases, the union of the petals found is the blossom $\mathcal{B}_{b,11}$.

Figure 15 illustrates the second way in which DDFS may end, i.e., instead of a bottleneck, it finds two unmatched vertices; this happens when DDFS is performed on bridge (u, v) of tenacity 11.

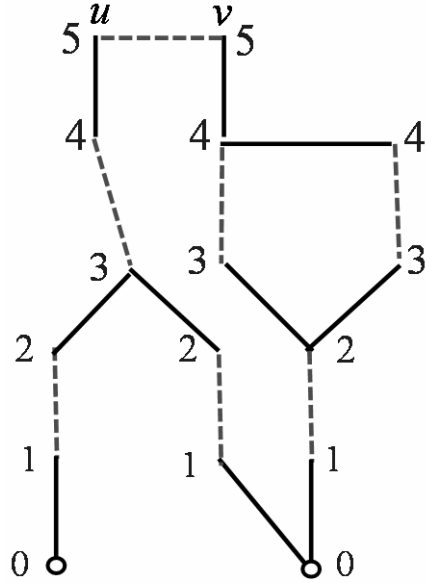


Figure 15: DDFS on the bridge of tenacity 11 ends with the two unmatched vertices.

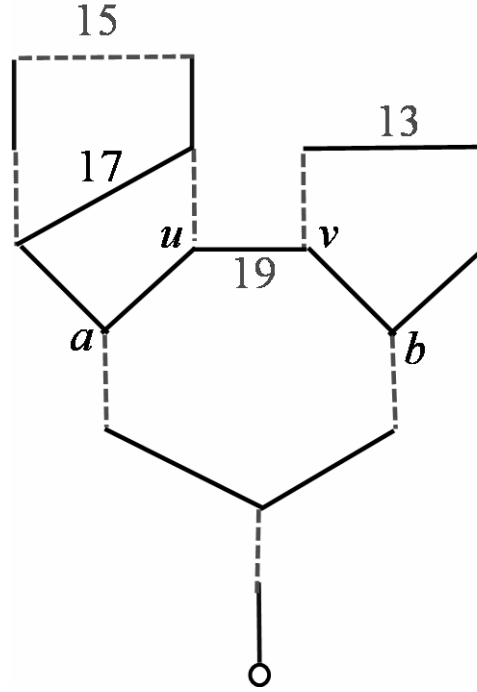


Figure 16: DDFS performed on bridge (u, v) starts the two DFSs at a and b , respectively.

We need to point out one final rule: if DDFS is performed on bridge (u, v) , the centers of activity of the two DFSs must start at $\text{bud}^*(u)$ and $\text{bud}^*(v)$. This rule was vacuous so far, but will be applicable while processing bridge (u, v) in Figure 16. The tenacity of this bridge is 19 and it will be processed by MAX in search level 9. At that point in the algorithm, the bridges of tenacity 15 and 13 would already be processed and u and v will already be in petals, with $\text{bud}(u) = \text{bud}^*(u) = a$ and $\text{bud}(v) = \text{bud}^*(v) = b$. Hence the centers of activity of the two DFSs

will start at a and b , respectively. Similarly, in Figure 19, when DDFS is performed on bridge (u, v) of tenacity 15, $\text{bud}^*(u) = u$ and $\text{bud}^*(v)$ will be the unmatched vertex.

All bridges considered so far had non-empty supports; however, this will not be the case in a typical graph. As an example, consider the edge of tenacity 17 in Figure 16. Since it does not assign minlevels to either of its endpoints, it is a bridge and it clearly has empty support. DDFS will discover this right away since the bud^* of both of its endpoints is a .

At the end of search level $i = (t - 1)/2$, i.e., once MAX is done processing all bridges of tenacity t , compute the following set

$$B = \{\text{bud}^*(v) \mid \text{tenacity}(v) = t\}.$$

Then, with the help of the next lemma, all blossoms of tenacity t can be identified. The proof of this lemma is straightforward and is omitted.

Lemma 29 *The set of bases of all non-empty blossoms of tenacity t is precisely B . For each $b \in B$, the set S_t defined in Definition 16, for blossom $B_{b,t}$ is precisely $\{v \mid \text{tenacity}(v) = t \text{ and } \text{bud}^*(v) = b\}$.*

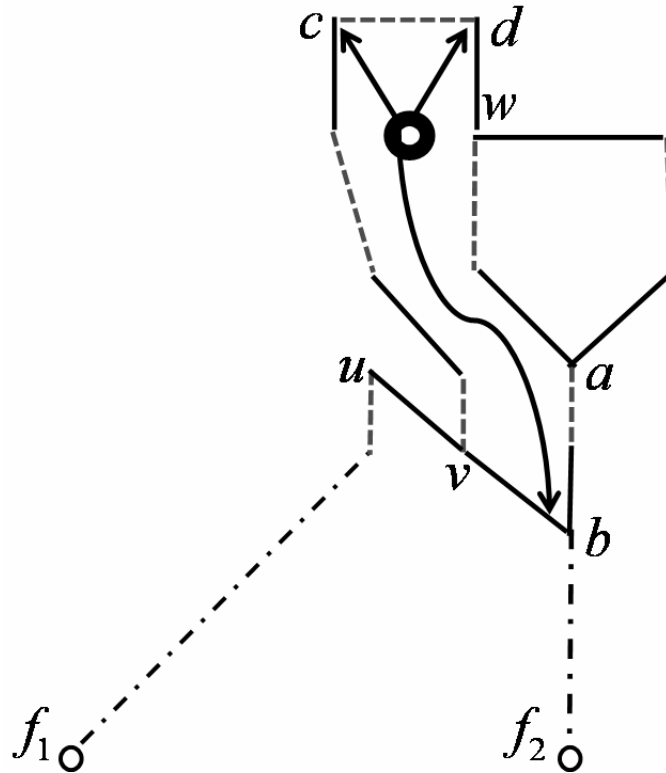


Figure 17: Constructing a minimum length augmenting path between unmatched vertices f_1 and f_2 .

7.3 Finding the augmenting paths

As stated at the beginning of this Section, during search level j_m , where $l_m = 2j_m + 1$ is the length of a minimum length augmenting path in G , a maximal set of such paths is found; observe that l_m is also the minimum oddlevel of an unmatched vertex. In contrast to previous search levels, in which all DDFSs will end with a bottleneck, in search level j_m DDFS performed on certain bridges will end in two unmatched vertices. In this section, we give the procedure that is followed each time such a bridge is encountered; in effect, the operations of MAX have to be enhanced during search level j_m .

Besides the above-stated event, i.e., at a certain search level, DDFS ends in two unmatched vertices, another possibility is that G contains two or more unmatched vertices but it has no augmenting paths, i.e., the current matching is maximum (if so, no unmatched vertex will have a finite oddlevel). The algorithm will recognize this when it is done assigning minlevels and maxlevels to as many vertices as it could, i.e., it has explored the unmatched edges incident at all vertices having a finite evenlevel, the matched edge incident at all vertices having a finite oddlevel, and has performed DDFS on all bridges of finite tenacity that it has identified.

7.3.1 Finding one augmenting path

In Figure 15, when DDFS performed on bridge (u, v) of tenacity 11 at search level 5, it ends with the two unmatched vertices. The next task is to find an augmenting path of length 11 between the two unmatched vertices and containing edge (u, v) . We will describe this via the graph in Figure 17. In this figure, $\text{minlevel}(u) > \text{minlevel}(v)$ and hence edge (u, v) is a bridge. DDFS on this bridge terminates with the two unmatched vertices, f_1 and f_2 . At this point, the stack of the DFS starting at u (v) contains all the vertices of tenacity l_m that lie on the part of the augmenting path from u to f_1 (v to f_2); observe that the bottom of the latter stack will contain $b = \text{bud}(v)$. All vertices of tenacity less than l_m that constitute such an augmenting path are missing; they lie in petals whose bud*s, which are of tenacity l_m , sit on the two stacks. The procedure given below will find one such complete augmenting path by recursively “opening” the nested petals.

Let us show how to construct the path from v to f_2 . Since $\text{bud}(v) = b$, we first need to find an $\text{evenlevel}(b; v)$ path from v to b . The actions are different depending on whether v is outer or inner; in this case v is inner. Therefore, $\text{evenlevel}(b; v) = \text{maxlevel}(b; v)$, i.e., the path must use the bridge of this petal, which is (c, d) . By jumping from v to its petal-node, the algorithm can get to the endpoints of this bridge. The “red” and “green” colors on the vertices of this petal, as assigned by DDFS (see Section 6), indicate that v was found via the DFS starting at c , say this is the red tree. The algorithm does a DFS on the red edges of this petal, starting from c , and finds a red path to v . Also, it does a DFS from d on the green edges to find a green path to b .

By the rules set above, the DFS that started at d must have skipped to $a = \text{bud}(w)$ while searching along edge (d, w) . Therefore, the green tree yields the “path” d, a, b . At this point, we need to recursively “open” the petal whose bud is a and find an $\text{evenlevel}(a; w)$ path in it. Again, we ask whether w is outer or inner. This time the answer is “outer” and so we simply keep picking predecessors of vertices until we get from w to a . This path is inserted in the right place in the “path” from d to b . The path from b to f_2 is obtained via the same process: following down predecessors and recursively finding paths through any petals that are encountered on the way.

7.3.2 Finding a maximal set of paths

Section 7.3.1 gave the procedure for finding one minimum length augmenting path, say p . We now build on it to find a maximal set of disjoint minimum length augmenting paths; recall that this was the objective of a phase. We first show how to identify the set of vertices that cannot be part of an augmenting path that is disjoint from p . These will be removed from the graph, and MAX will proceed until it encounters another bridge which makes DDFS end with two unmatched vertices. The processes are repeated until all bridges of tenacity l_m are processed. Since we do not remove any useful vertices, maximality is guaranteed.

First, all vertices of p are removed; together with a vertex, all its incident edges are also removed. As a result, we may create vertices that have no more predecessors. Each such vertex v is also removed since the current graph does not contain a $\text{minlevel}(v)$ path anymore. This process is continued until every remaining vertex, other than unmatched ones, has a predecessor.

Let us argue that the next time DDFS ends with two unmatched vertices, we are guaranteed to find an augmenting path between them. The main question is, “How are we sure that the procedure of Section 7.3.1 will be able to find appropriate paths through blossoms that have lost some of their vertices?”

The structural properties established in Section 4 render the answer to this question surprisingly simple. Assume that vertex $v \in p$ is in blossom $\mathcal{B}$ and that vertex u is in the left-over part of this blossom. By Corollary 13, p must contain the iterated bases of v and the next minimum length augmenting path, using u , must also contain the iterated bases of u . However, the base, b , of blossom $\mathcal{B}$ is an iterated base of both the vertices! Therefore, b will be removed when p is removed and u cannot be on any minimum length augmenting path that is disjoint from p . Indeed, it is easy to see that the process of iteratively removing vertices that have no predecessors left will end up removing all of $\mathcal{B}$.

8 Proof of correctness and running time

Lemma 30 *Let (u, v) be a bridge such that $\text{tenacity}(v) = \text{tenacity}(u, v) \leq l_m$. Then the expression for $\text{tenacity}(u, v)$ uses $\text{minlevel}(v)$.*

Proof : If (u, v) is matched, u and v must both be inner vertices, since otherwise (u, v) will be a prop. Also, in this case, the expression for $\text{tenacity}(u, v)$ uses $\text{oddlevel}(v)$, which is $\text{minlevel}(v)$. Next assume that (u, v) is unmatched. Therefore the equality $\text{tenacity}(v) = \text{tenacity}(u, v)$ implies

$$\text{oddlevel}(v) + \text{evenlevel}(v) = \text{evenlevel}(u) + \text{evenlevel}(v) + 1 \implies \text{oddlevel}(u) = e(v) + 1.$$

Now, if $\text{oddlevel}(v) = \text{minlevel}(v)$ then u must be a predecessor of v , contradicting the hypothesis that (u, v) is a bridge. Therefore, $\text{oddlevel}(v) = \text{maxlevel}(v)$. On the other hand, the expression for $\text{tenacity}(u, v)$ uses $\text{evenlevel}(v)$ and hence it uses $\text{minlevel}(v)$. $\square$

Lemma 31 *For each bridge (u, v) having tenacity $2i + 1 \leq l_m$, the algorithm will determine that (u, v) is a bridge and that its tenacity is $2i + 1$ by the end of execution of procedure MIN at search level i .*

Proof : First assume that (u, v) is matched. Since it is not a prop, u and v must both be inner vertices with $\text{oddlevel}(u) = \text{oddlevel}(v) = i$. Therefore, during search level i , MIN will determine that (u, v) is a bridge and that its tenacity is $2i + 1$.

Next assume that (u, v) is unmatched and that $\text{evenlevel}(u) \leq \text{evenlevel}(v)$ and that (u, v) is first scanned from u . Clearly $\text{evenlevel}(u) \leq i$. Since (u, v) is not a prop, v must already have a minlevel and $\text{minlevel}(v) \leq i$. By Lemma 3, $\text{tenacity}(v) \leq \text{tenacity}(u, v)$. Now if $\text{tenacity}(v) < \text{tenacity}(u, v)$, both levels of v are already known and hence $\text{tenacity}(u, v)$ can be determined. If $\text{tenacity}(v) = \text{tenacity}(u, v)$ then by Lemma 30 the expression for $\text{tenacity}(u, v)$ uses $\text{minlevel}(v)$ and hence $\text{tenacity}(u, v)$ can be determined. Further notice that since $\text{tenacity}(u, v) = 2i + 1$, $\text{minlevel}(v)$ must be i . $\square$

Theorem 32 *For each vertex v such that $\text{tenacity}(v) \leq l_m$, Algorithm 1 assigns $\text{minlevel}(v)$ and $\text{maxlevel}(v)$ correctly.*

Proof : We will show by strong induction on i that at search level i , Algorithm 1 assigns a minlevel of $i + 1$ to exactly the set of vertices having this minlevel and it assigns appropriate maxlevels to exactly the set of vertices having tenacity $2i + 1$. The basis, i.e., $i = 0$, is obvious.

To prove the induction step, assume that the hypothesis is true for all search levels less than i . Let $\text{minlevel}(v) = i + 1$, let p be a $\text{minlevel}(v)$ path, starting at unmatched vertex f , and let (u, v) be the last edge on p . It is easy to see that u must be BFS-honest w.r.t. p ; if not, then v must occur on the shorter path to u , which contradicts the assumption that $\text{minlevel}(v) = i + 1$. Therefore, if $|p[f \text{ to } u]|$ is odd (even), $\text{oddlevel}(u) = i$ ($\text{evenlevel}(u) = i$). By the induction hypothesis, u must be assigned this level, regardless of whether it is the minlevel or maxlevel of u . Therefore, on searching along an appropriate parity edge incident at u , MIN will find v . By the induction hypothesis, at the start of search level i , the minlevel of v is not set. Therefore, when edge (u, v) is examined, it is either still not set or it is set to $i + 1$ through some other edge scanned in the current search level (the latter case happens only if $\text{oddlevel}(v) = i + 1$). Hence, while searching along edge (u, v) , v will be assigned its correct minlevel, u will be declared a predecessor of v and (u, v) will be declared a prop.

Next, assume $t(v) = 2i + 1$ and let p be a $\text{maxlevel}(v)$ path. By Theorem 25 there exists a unique bridge of tenacity t on p , say it is (a, b) . By Lemma 31, by the end of MIN in search level i , (a, b) must be inserted in the list $B(2i + 1)$. Therefore, MAX will call DDFS with this bridge to find its support. By the induction hypothesis, $\text{maxlevel}(v)$ was not set in any of the previous search levels⁷. However, it may be set in the current search level; if so, v already belongs to a petal. If it is not set, DDFS will reach v and assign it its maxlevel. $\square$

In Figure 18, the algorithm determines that (u, v) is a bridge of tenacity 15 at search level 6. However, according to Algorithm 1, DDFS has to be performed on (u, v) at search level 7. The question arises, “Why wait till search level 7; why not perform DDFS on (u, v) when procedure MAX is run at search level 6?” To clarify this, let us change the algorithm so it runs DDFS on an edge as soon as its tenacity and its status as a bridge have been determined. Assume further that among the various bridges ready for processing, ties are broken arbitrarily⁸.

⁷The importance of this subtle point, which is related to the idea of “precise synchronization of events” is explained below with the help of Figures 18 and 19.

⁸By making the example given in Figure 19 slightly bigger, one can easily ensure that there are no ties of this sort.

claim made in [MV80] that because of the special structure of blossoms, path compression itself suffices, together with a charging argument that assigns a constant cost to each edge.

9 Equivalence of definitions

Below we establish equivalence of the two definitions of blossoms. Let us start by providing the definition of blossom as given in [Vaz94]; we will denote such a blossom of tenacity $t < l_m$ and base b by $\mathcal{B}_{b,t}^o$. Let v be a vertex with $\text{tenacity}(v) \leq t$. We will say that an outer vertex b is $\text{base}_{>t}(v)$ if for some positive k , $\text{base}^k(v) = b$, $\text{tenacity}(b) > t$, and $\text{tenacity}(\text{base}^{k-1}(v)) \leq t$. Then

$$\mathcal{B}_{b,t}^o = \{v \mid \text{tenacity}(v) \leq t \text{ and } \text{base}_{>t}(v) = b\}.$$

Proposition 34 *The two definitions of blossom are equivalent, i.e., $\mathcal{B}_{b,t} = \mathcal{B}_{b,t}^o$.*

Proof : Let $v \in \mathcal{B}_{b,t}$. We will show that $v \in \mathcal{B}_{b,t}^o$ by considering the following three cases. The set S_t is defined in Definition 16.

1. $v \in S_t$. In this case, $\text{tenacity}(v) = t$ and $\text{base}(v) = b$, and therefore $\text{base}_{>t}(v) = b$. Hence $v \in \mathcal{B}_{b,t}^o$.
2. $v \in \mathcal{B}_{b,t-2}$. In this case, $\text{tenacity}(v) < t$ and for some $k \geq 1$, $\text{base}^k(v) = b$. Clearly, $\text{base}^{k-1}(v) \in \mathcal{B}_{b,t-2}$ and therefore $\text{base}_{>t}(v) = b$. Hence $v \in \mathcal{B}_{b,t}^o$.
3. $v \in \mathcal{B}_{u,t-2}$ and $u \in S_t$. In this case, $\text{tenacity}(v) < t$, $\text{tenacity}(u) = t$, $\text{base}(u) = b$, and for some $k \geq 1$, $\text{base}^k(v) = u$. Therefore, $\text{base}^{k+1}(v) = b$ and $\text{base}_{>t}(v) = b$. Hence $v \in \mathcal{B}_{b,t}^o$.

Next, let $v \in \mathcal{B}_{b,t}^o$. Once again we will consider three cases to show that $v \in \mathcal{B}_{b,t}$.

1. $\text{tenacity}(v) = t$. In this case, $\text{base}(v) = b$ and therefore $v \in S_t$. Hence $v \in \mathcal{B}_{b,t}$.
2. $\text{tenacity}(v) < t$, for some $k \geq 1$, $\text{base}^k(v) = b$ and $\text{tenacity}(\text{base}^{k-1}(v)) < t$. In this case, $v \in \mathcal{B}_{b,t-2}$. Hence $v \in \mathcal{B}_{b,t}$.
3. $\text{tenacity}(v) < t$, for some $k \geq 1$, $\text{base}^k(v) = b$ and $\text{tenacity}(\text{base}^{k-1}(v)) = t$. Let $\text{base}^{k-1}(v) = u$. Then, $\text{tenacity}(u) = t$ and $\text{base}(u) = b$. Therefore, $u \in S_t$ and $v \in \mathcal{B}_{u,t-2}$. Hence $v \in \mathcal{B}_{b,t}$.

□

10 Acknowledgments

Bob Tarjan initiated the idea of giving talks on the MV algorithm (which unfortunately had remained a “black box” result for 32 years) and also encouraged me to write a fresh manuscript. I had valuable discussions with Bob Tarjan and Laci Lovasz, and I wish to thank them both profusely. I also wish to thank Jugal Garg and Rakshit Trivedi, with special thanks to Ruta Mehta, for allowing me to sound out my ideas as they were evolving.

References

- [Blu90] N. Blum. A new approach to maximum matchings in general graphs. In *International Colloquium on Automata, Languages, and Programming*, pages 586–597, 1990.
- [Edm65a] J. Edmonds. Maximum matching and a polyhedron with 0,1-vertices. *Journal of Research of the National Bureau of Standards. Section B*, 69:125–130, 1965.
- [Edm65b] J. Edmonds. Paths, trees, and flowers. *Canadian Journal of Mathematics*, 17:449–467, 1965.
- [Ege31] J. Egerváry. On combinatorial properties of matrices. *Mat es Fizikai Lapok*, 38:16–28, 1931.
- [GK04] A. V. Goldberg and A. V. Karzanov. Maximum skew-symmetric flows and matchings. *Math. Program., Ser. A*, 100:537568, 2004.
- [GS62] D. Gale and L. S. Shapley. College admissions and the stability of marriage. *The American Mathematical Monthly*, 69(1):9–15, 1962.
- [GT85] H. N. Gabow and R. E Tarjan. A linear-time algorithm for a special case of disjoint set union. *J. Comput. System Sci.*, 30:209–221, 1985.
- [GT91] H. N. Gabow and R. E Tarjan. Faster scaling algorithms for general graph matching problems. *Journal of the ACM*, 38:815–853, 1991.
- [HK73] J. Hopcroft and R. M. Karp. An $n^{5/2}$ algorithm for maximum matching in bipartite graphs. *SIAM Journal on Computing*, 2:225–231, 1973.
- [JS89] M.R. Jerrum and A. Sinclair. Approximating the permanent. *SIAM Journal on Computing*, 18:1149–1178, 1989.
- [JVV86] M.R. Jerrum, L.G. Valiant, and V.V. Vazirani. Random generation of combinatorial structures from a uniform distribution. *Theoretical Computer Science*, 43:169–188, 1986.
- [Kar73] A. V. Karzanov. An exact estimate of an algorithm for finding a maximum flow, applied to the problem on representatives. *Problems in Cybernetics*, 5:66–70, 1973. Announced at the Seminar on Combinatorial Mathematics (Moscow, 1971).
- [Kon31] D. König. Graphs and matrices. *Mat es Fizikai Lapok*, 38:116–119, 1931.
- [Kuh55] H.W. Kuhn. The Hungarian method for the assignment problem. *Naval Research Logistics Quarterly*, 2:83–97, 1955.
- [LP86] L. Lovász and M.D. Plummer. *Matching Theory*. North-Holland, Amsterdam–New York, 1986.
- [MS04] M. Mucha and P. Sankowski. Maximum matchings via gaussian elimination. In *IEEE Annual Symposium on Foundations of Computer Science*, 2004.

- [MV80] S. Micali and V. V. Vazirani. An $O(\sqrt{V}E)$ algorithm for finding maximum matching in general graphs. In *IEEE Annual Symposium on Foundations of Computer Science*, 1980.
- [MVV87] K. Mulmuley, U.V. Vazirani, and V.V. Vazirani. Matching is as easy as matrix inversion. *Combinatorica*, 7(1):105–113, 1987.
- [Tar75] R. E Tarjan. Efficiency of a good but not linear set union algorithm. *Journal of the ACM*, 22:215–225, 1975.
- [Val79] L.G. Valiant. The complexity of computing the permanent. *Theoretical Computer Science*, 8:189–201, 1979.
- [Vaz94] V. V. Vazirani. A theory of alternating paths and blossoms for proving correctness of the $O(\sqrt{V}E)$ general graph maximum matching algorithm. *Combinatorica*, 14(1):71–109, 1994.